

HERRAMIENTAS Y MATERIALES RECOMENDADOS

Espátula – Destornillador plano – Llave ajustable – Sellador – Wincha – Arco de sierra – Nivel de carpintero.

(*) No incluido

PRECAUCIÓN


Este producto es frágil. Para evitar roturas y posible daño personal, maneje con cuidado. No utilizar masilla ni cemento.

Servicio al cliente
TREBOL-CELIMA
Telf. : (511) 614-0303
acliente@celima.com.pe
www.celima-trebol.com




INSTRUCCIONES DE INSTALACIÓN


DIMENSIONES DE INSTALACIÓN

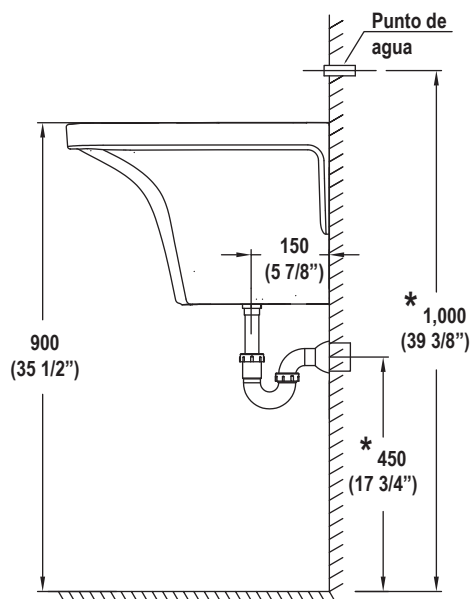

1 Verifique la altura de los puntos de agua y desagüe como se indica en el gráfico.

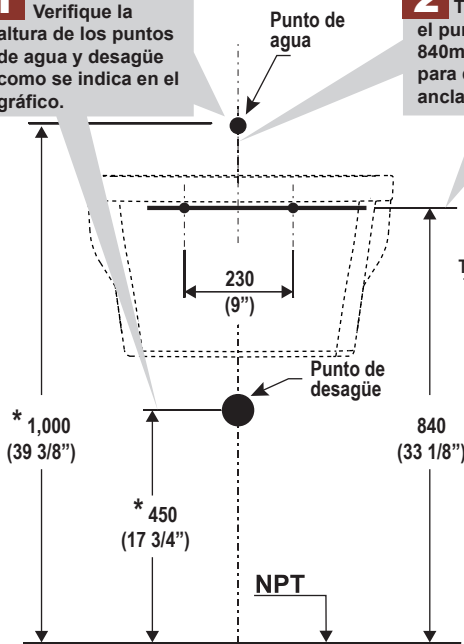


2 Trace en la pared el eje vertical desde el punto de desagüe. Luego marque a 840mm (33 1/8 inches) desde el piso terminado para definir la ubicación de los orificios de anclaje de la uña de sujeción.

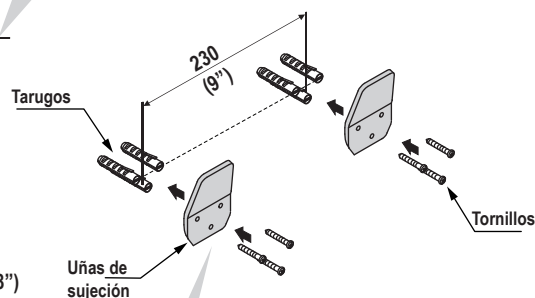


3 Instale las uñas de sujeción considerando los puntos marcados en la pared.

4 Coloque el lavadero sobre las uñas de sujeción y marque los orificios laterales, luego retire el lavadero.

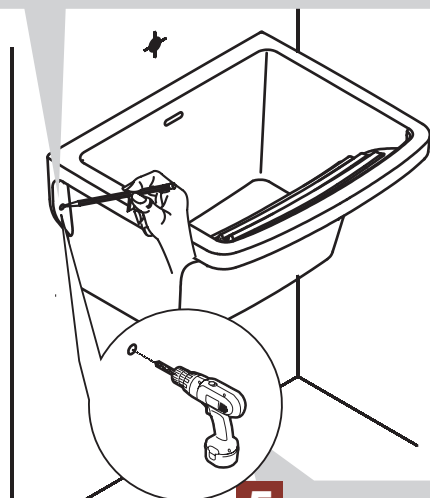


5 Perfore en los puntos marcados y coloque los tarugos plásticos.

6 Cuelgue el lavadero sobre las uñas de sujeción y asegure con los pernos de anclaje.

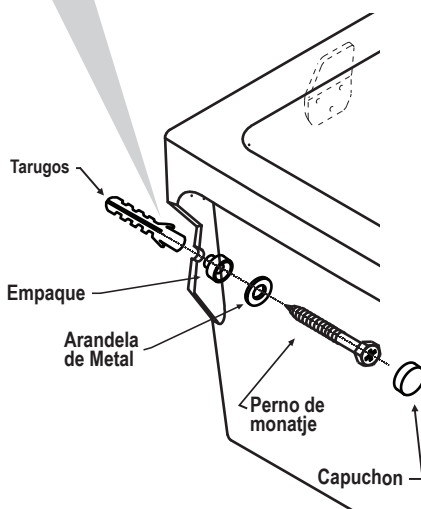

8 Instale la grifería (no incluida), Siga las instrucciones del fabricante.

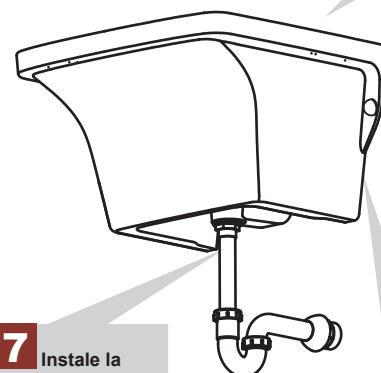

7 Instale la trampa y desagüe (incluido), siga las instrucciones del fabricante.

9 Aplique sellador o fragua alrededor de lavadero.

CUIDADOS Y MANTENIMIENTO



Lavar y limpiar con agua jabonosa. Enjuagar con agua limpia y secar con paño suave. Nunca emplear productos/materiales que puedan dañar la superficie.

RECOMMENDED TOOLS AND MATERIALS

Putty Knife - Flat screwdriver - Adjustable wrench - Sealant - Tape measure - Hacksaw - Carpenter's level.

(*) Not included

CAUTION


This product is heavy and fragile, To avoid breakage and possible injury, it should be handle with care. Do not use putty or cement.




Customer Service
TREBOL-CELIMA
Telf. : (511) 614-0303
acliente@celima.com.pe
www.celima-trebol.com

INSTALLATION INSTRUCTIONS

INSTALLATION DIMENSIONS

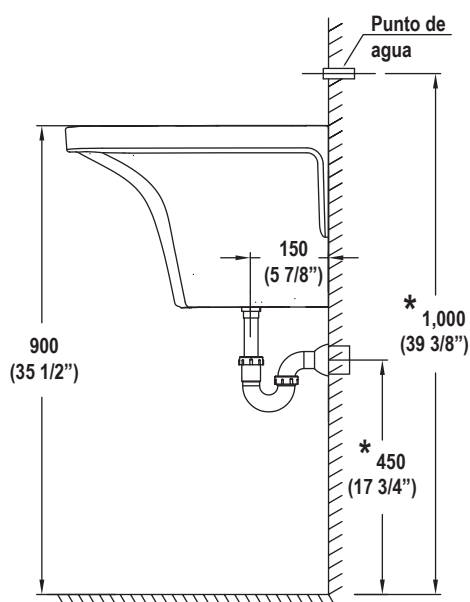


1 Check water and drain points height as shown.

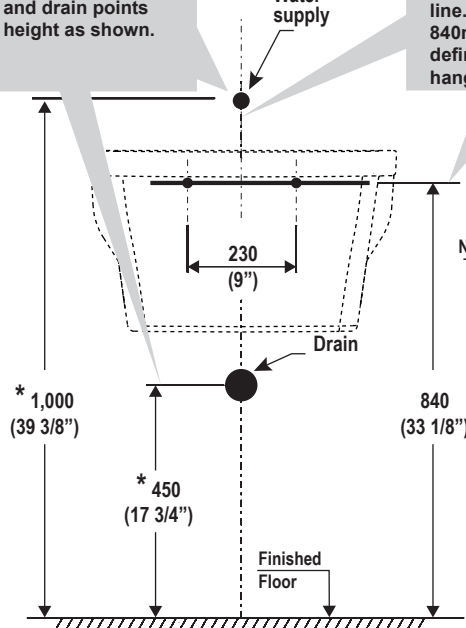

(*) Dimensions shown for water and drain points are recommended.

2 Draw on wall drain point vertical center line. Then mark an horizontal line to 840mm (33 1/8 inch) from finished floor to define location of anchor holes for wall hangers as shown.

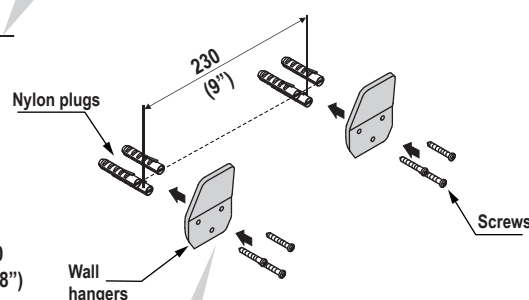


3 Install wall hangers considering points marked on wall.

4 Carefully position the laundry sink on the wall hangers and mark points to anchor holes.



5 Perfore en los puntos marcados y coloque los tarugos plásticos.

6 Mount the laundry sink on wall hangers and tighten the mounting bolts.

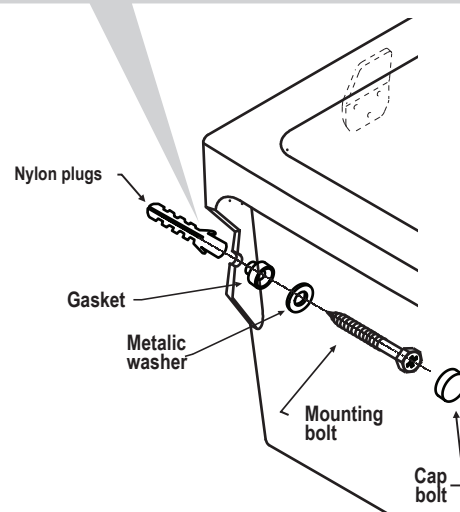

8 Install the faucet (not included) according to the manufacturer's instructions.



7 Install the trap and drain (included), according to the manufacturer's instructions

9 Apply sealant or grout around laundry sink.

CARE AND MAINTENANCE



Clean or wash with soapy water. Wash off the soap with clean water and dry with a soft cloth. Never use abrasive products or materials which could damage the surface. Doing so will void warranty. Do not use cement or rigid plasters.